


Network Video Recorder



EV-NVR16

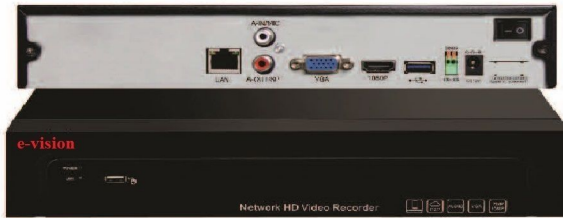

EV-NVR6001-36EX / EV-NVR6001-64EX

Key Features

- Support Ultra H.265+/H.265/H.264 video formats
- 16/36/64-channel input
- Supports mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 2 / 4 / 8 SATA HDDs, Up to 10TB / 16TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

Model	EV-NVR16		EV-NVR6001-36EX	EV-NVR6001-64EX
Video/Audio Input				
IP Video Input	16-ch	36-ch		64-ch
Two-way Audio Input	1-ch, RCA			
Network				
Incoming Bandwidth	384Mbps/576Mbps			
Outgoing Bandwidth	384Mbps/576Mbps			
Remote Users	128			
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS			
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows			
Video/Audio Output				
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1/HDMI2(HDMI audio output is not supported): 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz			
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Audio Compression	G.711A, G.711U			
Synchronous Playback	16-ch			
Liveview display	VGA/HDMI1/HDMI2: 1/4/6/8/9/16	VGA/HDMI1/HDMI2: 1/4/6/8/9/16/25/36	VGA: 1/4/6/8/9/16/25/36 HDMI1/HDMI2: 1/4/6/8/9/16/25/36/64	
Corridor Mode Screen	3/4/5/7/9/10/12/16	3/4/5/7/9/10/12/16/36		
Snapshot				
FTP/Schedule/Event Snapshot	16-ch snapshot, up to 4K resolution	36-ch snapshot, up to 4K resolution	64-ch snapshot, up to 4K resolution	
Decoding				
Decoding format	Ultra 265, H.265+, H.265, H.264			
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 36 x 960P@25	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1	
Hard Disk				
SATA	2 / 4 / 8 SATA interfaces			
Capacity	up to 10TB / 16TB for each HDD			
eSATA	1 eSATA interface			

Disk Group	Support
Compatible Integration	ONVIF Version 2.0, 2.1, 2.2, 2.3, 2.4 and 2.6 Support
Disk Array	
Array Type	RAID 0, 1, 5, 6, 10
General Alarm	
General Alarm	Motion, Tampering, Human Body Detection, Video Loss, Alarm input, Audio Detection, Face Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline , Disk Abnormal, Illegal Access, Hard disk space low, Hard disk full, Recording/Snapshot Abnormal (Optional)
External Interface	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB Interface	Front panel: 2 x USB2.0,Rear panel: 1 x USB3.0
RS232	1
RS485	1
Alarm In	16-ch
Alarm Out	4-ch
General	
Power Supply	100~240 VAC Power Consumption: ≤ 25 W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	442mm ×426mm× 89mm (17.4" × 16.8"× 3.5")
Weight (without HDD)	≤ 5.7Kg (12.57lb)
Certification	
Certification	BIS, CE, FCC, RoHS & ISO
Processor / Operating System	
Processor	Quad-core embedded processor
Operating System	Embedded LINUX