


## 4MP 4G Solar Dark Avenger Mini Pan-Tilt Camera EV-WFSC PTZ 4MP



### FEATURES

- 4MP pan/tilt Smart Mini PT 4G Solar Camera
- Horizontal rotation of 350 degrees, vertical rotation of 90 degrees
- Built-in high-sensitivity MIC and speaker, support two-way audio
- With white light and infrared light, support Two night vision mode : B/W mode, full color mode
- Support human detection. The device can turn on white light when someone into the monitoring area. And the real-time alarm push information is sent on mobile app
- Motion Tracking. When a human figure is detected will be track Automatically
- Built-in Siren. Siren will be trigger when human movement is detected. The voice of the siren can be customized.
- Built-in PIR Sensor
- Built-In Battery 18000mAh Rechargeable lithium battery, With 7W Solar Panel
- Unique With All-Time-Color vision
- Support Micro SD Card Up to 256GB & Cloud Storage (Optional)
- 4G connection, scan the QR code to easily connect the camera
- Support monitoring : Pc/Mobile on cloud
- IP67 Waterproof Rating, 4000 Lightning Protection
- Compression : H.264/H.265/H.265+

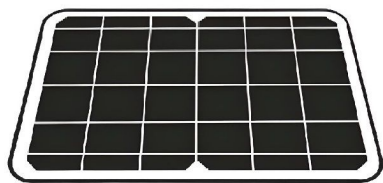

4G

256GB  
SD CardHuman  
DetectionFull-Duplex  
IntercomVoice  
PromptIP66  
RatingHigh Quality  
Solar PanelBattery  
Backup

### Technical Specifications

Product code	EV-WFSC PTZ 4MP
Image Sensor	1/2.8" CMOS Sensor
Resolution	4MP:2560 x 1440
Video Compression Standard	H.264+ / H.265 / H.265+
Lens	4mm @ F2.0, View angle: Horizontal 88.9° , Vertical 47.5° , 106.3° Diagonal
Infrared LED	4 LED
Infrared IR Distance	30 Meters
White LED	4 LED
White IR Distance	20 Meters
Light Mode	Full color / Infrared
Minimum Illumination	Color : 0.01Lux, Black and White :0.001 Lux
Video Encode Stream	Main stream :2304x1296 / 15FPS; Substream:640x360 / 15FPS
PTZ Rotation Range	Horizontal 350° 0.1~20°/sec, Vertical 105° 0.1~20°/sec;
Audio Input / Output	Supports two-way audio, built-in microphone and speaker
Audio Compression Standard	AAC / G711A
WDR	Support DWDR
Electronics Shutter	Auto
4G Frequency Band	FDD-LTE: B1 / B3/ B5/ B8; TDD-LTE: B34/ B38/ B39/ B40/ B41;
PIR Detection	8-10 Meter
Alarm	1) Motion Detection, Alarm Picture Push 2) Human Detection
Monitoring	Android & iPhone / Windows PC (Application cloud)

Storage	Support Micro SD card (Max 256G)
Solar Panel	7W
Power Supply	Built-In Rechargeable 18000mAh Battery
Power Input	Type-C DC 5V-2A
Working Temp	0~50°C RH Less than 95% (No condensation)
Storage Temperature/Humidity	-20°C to +60°C / 20% to 90% RH
Housing type	Plastic [IP66]
Dimension	132 x 191 x 170mm (WxHxL)
Net Weight	0.723kg
Gross Weight	0.978kg